
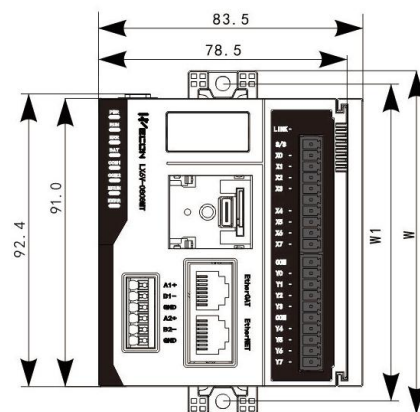


LX6V Model	I/O	Output Type	Pulse Counter	E-CAM	Pulse Output	RS485	BD Board	Module	Power Supply	Ethernet	EtherCAT	Axis
LX6V-0808MT-DB	08/08	Transistor	8	YES	4	2	N/A	YES	DC	YES	YES	16
LX6V-0808MT-DD	08/08	Transistor	8	YES	4	2	N/A	YES	DC	YES	YES	64
LX6V-0808MT-DE	08/08	Transistor	8	YES	4	2	N/A	YES	DC	YES	YES	128

GENERAL

Item	LX6V-0808MT
Running Mode	Cycle Scan / Interrupt
Programming	Instruction Table / Ladder Diagram / FB / FC
Total Instructions	Basic instruction: 29 / Application instruction: 170
Execute Time	Basic instruction 0.01-0.02 μ s
Program Capacity	5M
Download/ Monitoring	Programming cable (Port)
	Ethernet
	USB Type-C
High Speed Pulse Output	Transistor type 4 channels/200kHz
High Speed Counter Interrupt	100 channels
Timer Interrupt	100 channels, supporting 0.1ms interrupt
External Input Interrupt	X0-X7 supporting both rising and falling edges
High Speed Input Single	8 channels 150kHz
High Speed Input AB Phase	4 channels 150kHz, supports 2 or 4 frequency multiplication
Power-down Save	Adjusted by software
Filter	For all the input terminals
Serial Port	RS485, RS485
Temperature	Working Temperature : 0 ~ 55 $^{\circ}$ C / Storage Temperature : -20 ~ 70 $^{\circ}$ C
Humidity	35~ 85%RH (Without condensation)
Shock Resistance	JISC0040 Standard
Influence Immunity	Meet the IEC61000-4-4 and GB/T 17626.4 standard: Noise voltage amplitude 1KVP-P , Pulse width 10 μ s, Period 0.3 s, Edge time 5ns , Duration 1min.
TF Card	Support
Ethernet	Gigabit Ethernet
EtherCAT	Up to 128 servo axes



Right view

