


Model	Channels	Resolution	Functionality
LX3V-8EYR	8	--	8 outputs, relay type
LX3V-8EYT	8	--	8 outputs, transistor type
LX3V-16EYR	16	--	16 outputs, relay type
LX3V-16EYT	16	--	16 outputs, transistor type
LCM-16EYR	16	--	16 outputs, relay type support RS485 Modbus communication



Specification

Item	LX3V-8EYR	LX3V-8EYT
Output circuit		
Power supply	Less than AC25V or DC30V	DC5V ~ 30V
Circuit insulation	Mechanical	Photo-coupling
LED	LED ON when relay is energized	LED on when Photo-coupling is driven
Load	Resistance	2A/ one point
	Inductance	8A/ two-point COM
	Lamp	8A/ eight-point COM
Leakage current	-----	0.1mA/DC30V
Minimum load	DC5V 2mA reference value	-----
OFF->ON	About 10ms	Less than 0.2ms
ON->OFF		
CE Certification	CE marked	CE marked

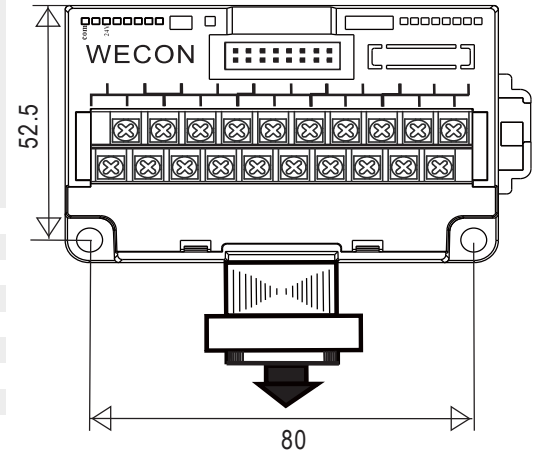

Item	LX3V-16EYR	LCM-16EYR	LX3V-16EYT
Output circuit			
Power supply	Less than AC250V or DC 30V		DC 5V~ 30V
Circuit insulation	Mechanical		Photo-coupling
LED	Light when relay is energized		Light when photo-coupling is energized
Load	Resistance	2A/ point 8A/ four points 8A/ eight points	0.5A/ point 0.8A/ four points 1.6A/ eight points
	Inductance	80VA	12W/DC24V
	Lamp	100W	1.5W/DC24V
Leakage current	--		0.1mA/ DC 30V
Minimum load	--		DC 5V 2mA
OFF->ON	About 10ms		Less than 0.2ms
ON-> OFF	About 10ms		Less than 0.2ms

