



Model	COM	Ethernet	Monitoring	Alarm	Data Record	Validity	WIFI / 4G	Pass-through	Script
V-BOX H-00	4 in 3	3	300	200	50	90 days / 1 millions	N/A	Serial / WVPN	Yes
V-BOX H-4G	4 in 3	3	500	300	100	180 days / 1 millions	4G	Serial / WVPN	Yes
V-BOX H-AG (global)	4 in 3	3	600	300	100	180 days / 1 millions	4G	Serial / WVPN	Yes
V-BOX H-WF	4 in 3	3	300	200	50	90 days / 1 millions	WIFI	Serial / WVPN	Yes

SPECIFICATIONS

Items	V-BOX H-00	V-BOX H-4G	V-BOX H-AG	V-BOX H-WF
OS		Linux		
CPU		Cortex A7		
Flash		128MB		
RAM		DDRIII 128MB		
SD Card		N/A		
MICRO USB		USB Host/Device : USB OTG Switch		
Serial Port		COM1 : RS232, RS485/RS422 (2 in 1)		
		COM2 : RS485		
		COM3 : RS485		
Digital I / O		2 inputs with optocoupler isolation; 2 relay outputs		
Ethernet Port		3 Ethernet ports (2*LAN+1*WAN)		
WIFI Module	N/A	N/A	N/A	YES
Power Supply		24VDC (12~28VDC)		
Power Consumption		<10w		
Enclosure		PC+ABS		
Dimension (W*H*D)		131.0mm*100.5mm*46.0mm		
Weight (KG)		0.3		
Vibration Resistance		10~25Hz (X, Y, Z direction 2G/30 minutes)		
Storage Temperature		-20°C~70°C		
Working Temperature		-10°C~60°C		
Relative Humidity		10~85% RH (Non-condensing)		
CE Certification		CE Marked		
FCC Certification		FCC Class A		
HTTP Interface		Yes		
Remote Update		Yes		
Configuration Backup		Yes		
Off-line Transmission		Yes		
GPS	N/A	LBS	LBS	N/A

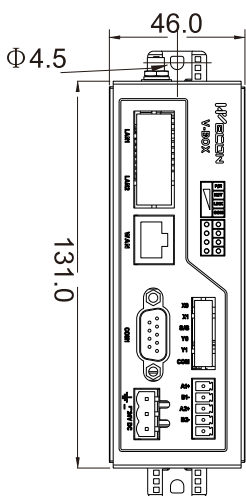

(Din rail)

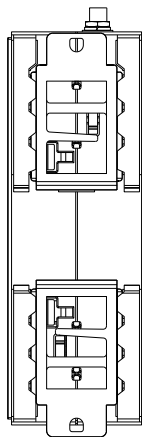

(Screw mount)

